

## Samsung DVM S Series Multiposition Air Handler Unit

Job Name \_\_\_\_\_  
 Purchaser \_\_\_\_\_  
 Submitted to \_\_\_\_\_  
 Unit Designation \_\_\_\_\_

Location \_\_\_\_\_  
 Engineer \_\_\_\_\_  
 Reference \_\_\_\_\_ Approval \_\_\_\_\_ Construction \_\_\_\_\_  
 Schedule # \_\_\_\_\_

## Specifications

Performance	Nominal Capacity (Btu/h)	Cooling	60,000
		Heating	64,000
Power	Voltage	ø / V / Hz	1 / 208-230 / 60
	Nominal Input Current*	Cooling (A)	2.74
	MCA*	Amps	2.6
	MOCP*	Amps	15
Fan	Type	Double-inlet, forward curve, centrifugal	
	Motor	Type	Constant-torque (ECM)
		HP	3/4
		Output (W)	590
Airflow	CFM @ 0.4" ESP (UL)	L / M / H	1,124 / 1,380 / 1,768
External Static Pressure	Standard	"WC	0.4
	Min. / Max.	"WC	0.1 / 1.0
Refrigerant	Type	R410A	
	Control Method	Electronic Expansion Valve	
Piping Connections	Liquid	Inches	3/8
	Suction	Inches	3/4
	Drain	Inches	3/4" FNPT
Unit Dimensions	W X H X D	Inches	24 1/2 X 58 3/4 X 21 3/4
	Weight	lbs.	226
Sound Level	Low / Mid / High	dB(A)	42 / 44 / 46
Accessories	Filter Base W/1" Filter		VFB-3
	External Temperature Sensor		MRW-TA
	Supplemental Electric Heater Kit	5Kw	VHK-305A
		10Kw	VHK-310A
		15Kw	VHK-315A
		20Kw	VHK-320A
	Downflow Conversion Kit		VDK-3
	External Contact Control		MIM-B14
CN83 Pigtail (for external contact input)		DB39-01263A	
Safety Certifications			ETL (UL 1995)



- Compatible with Samsung DVM S, DVM S Water, and DVM Eco systems (AM\*\*\*\*\*AA).
- High-voltage terminal block temperature sensor to disable unit in the event overheating of controls power connection.
- Multiposition - vertical, horizontal left, and horizontal right.
- Capable of being field convertible to downflow configuration with optional downflow conversion kit.
- Air handler has an air leakage of no more than 2 percent of the design air flow rate when tested in accordance with ASHRAE 193.

## Construction

The unit shall be constructed of insulated, powder coated, galvanized steel

## Heat Exchanger

The heat exchanger shall be mechanically bonded fin to copper tube

## Indoor Fan

Indoor fan is a double-inlet, forward curve, centrifugal type with a single constant-torque (ECM) fan motor

The indoor unit shall have low, medium, high, and auto fan speed setting options.

Five fan speed taps for optional air flow setting during installation

The indoor unit shall have the capability to turn the fan off in heating or cooling modes while in thermal-OFF status (external sensor required).

## Controls

0 volt ON/OFF control (ex: auxiliary drain switch) when using the optional CN83 pigtail (part number DB39-01263A, sold separately).

The indoor unit shall integrate with the Samsung NASA Controls Network Solution

Controls shall integrate with a BMS system

Control wiring shall be 2 X 16 AWG shielded wire

## Air Filtration

Air filtration must be field provided


\*Power data is without optional electric heat kits installed.

<sup>1</sup> Nominal cooling capacities are based on: Indoor temperature: 80 °F DB, 67°F WB. Outdoor temperature: 95°F DB, 75°F WB.  
 Nominal heating capacities are based on: Indoor temperature: 70 °F DB, 60°F WB. Outdoor temperature: 47°F DB, 43°F WB.

<sup>2</sup> Refer to technical data book for fan performance details and settings

Samsung HVAC maintains a policy of ongoing development, specifications are subject to change without notice.

## Samsung DVM S Series Multiposition Air Handler Unit Dimensional Data

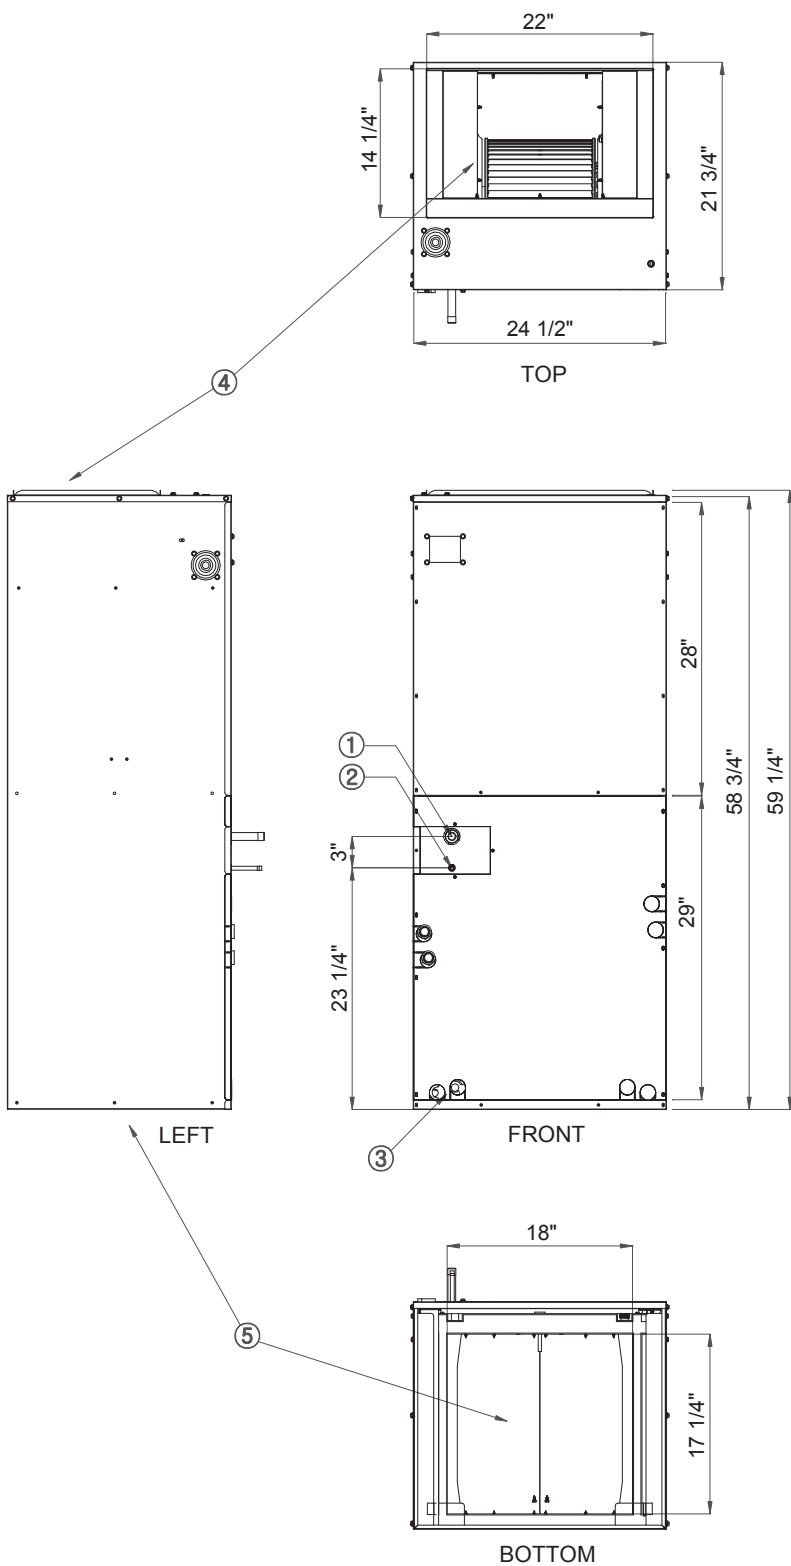

No.	Description
①	Gas Pipe
②	Liquid Pipe
③	Drain Connection
④	Air Outlet
⑤	Air Inlet

